



Installation Guide / Manual (Systems Mount Solutions)


Floor Mount (SMS-200 Series)

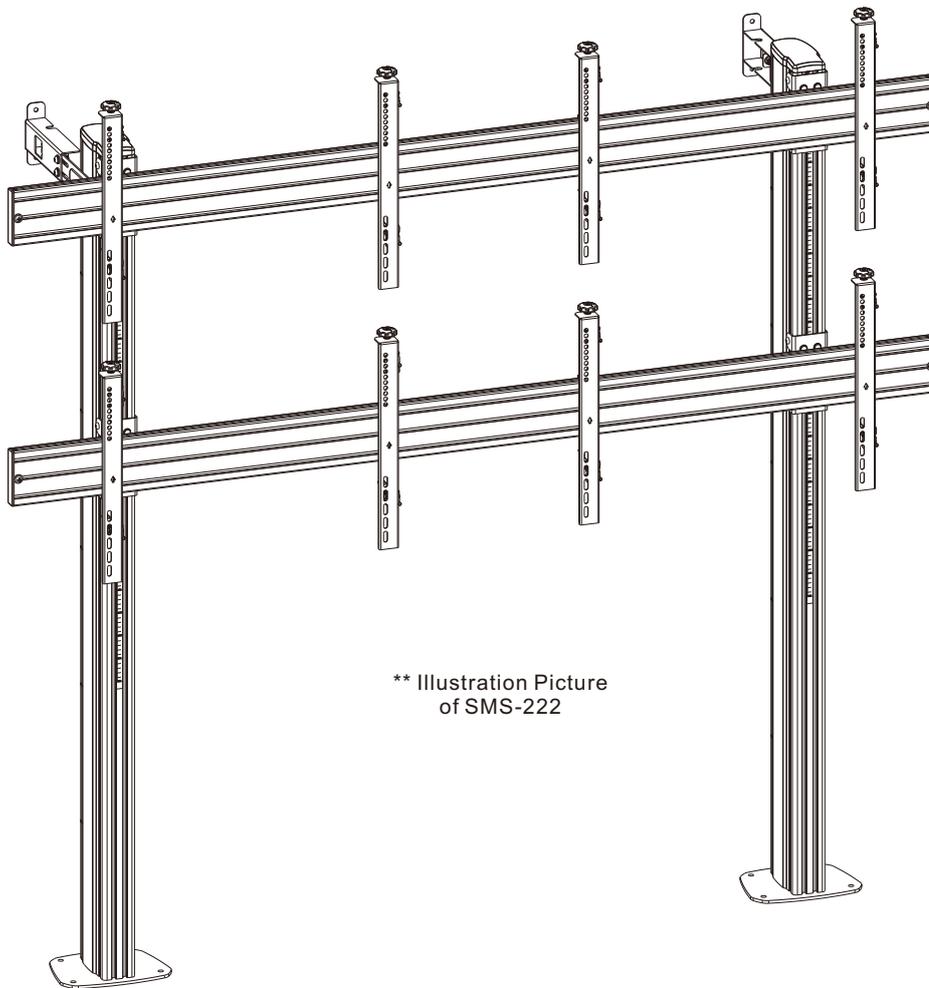


** Illustration Picture of SMS-222

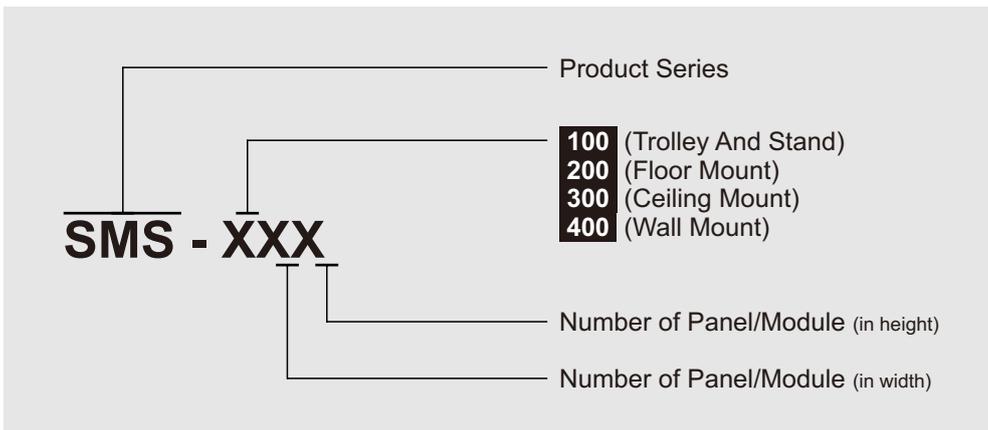


Column L1800

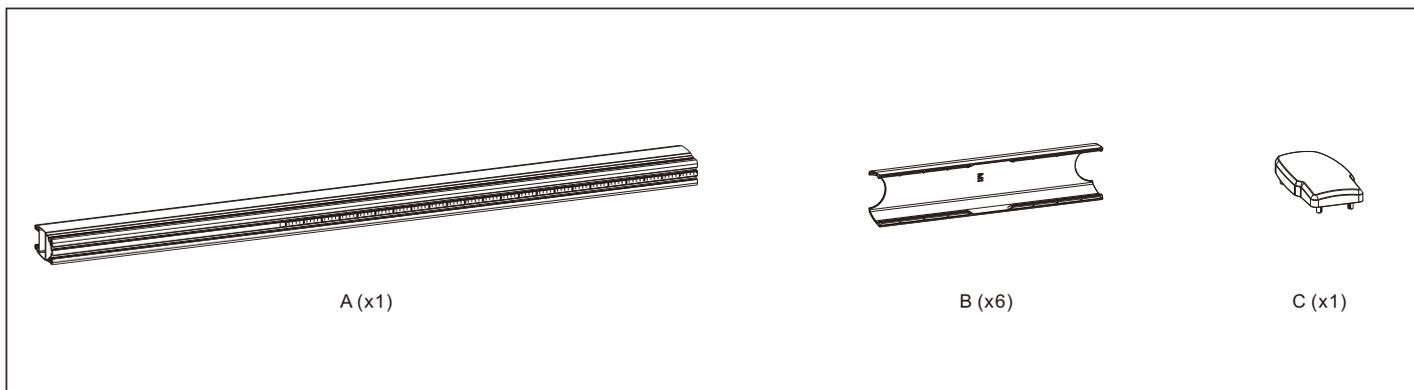


Install the End Cap

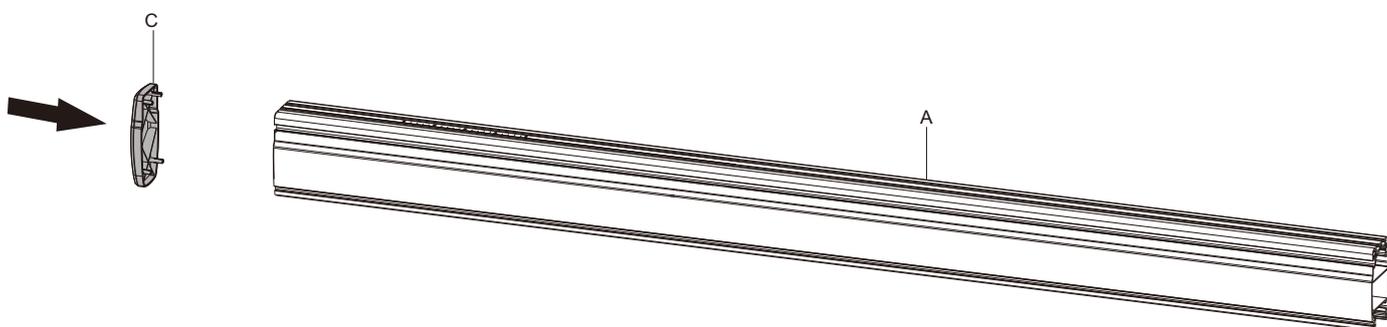


Install Cable Cover (included) and Power Socket (Optional)

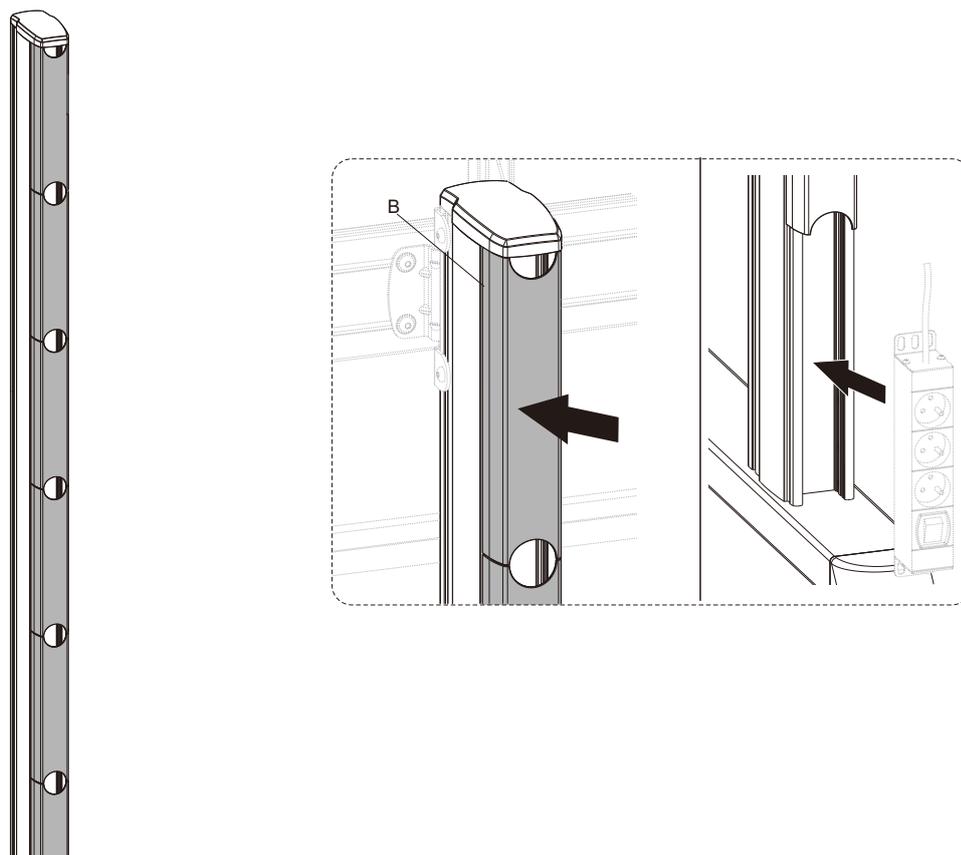


Rail L2000

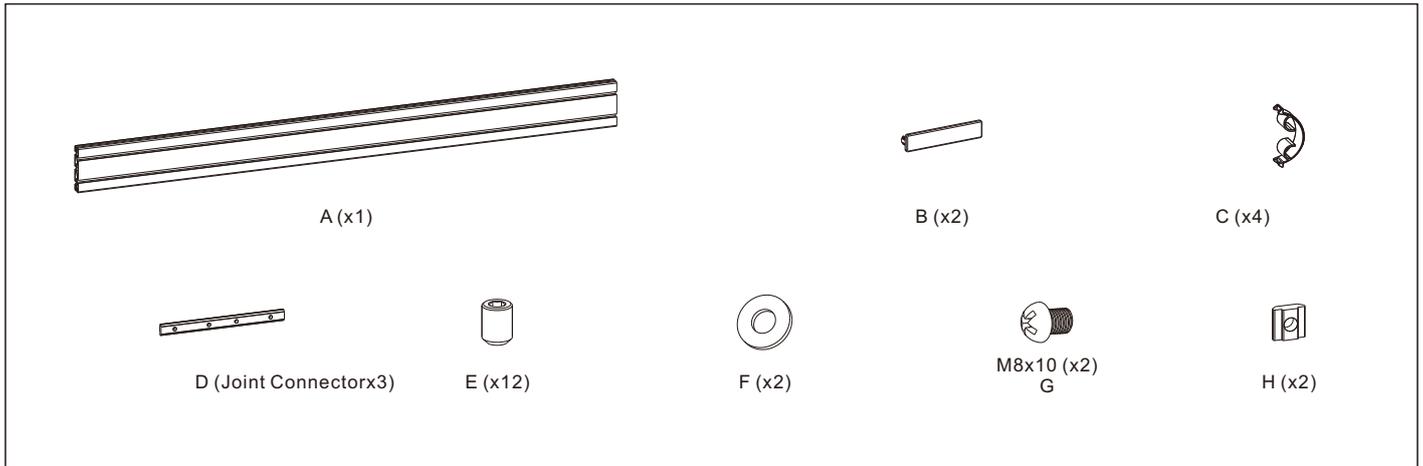


Extend the Rail 2000

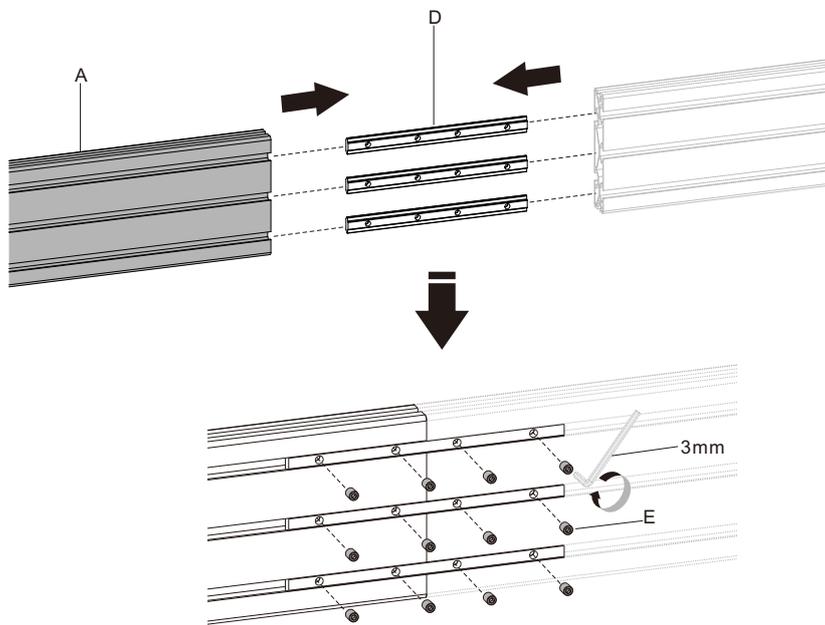


Install the End Cap

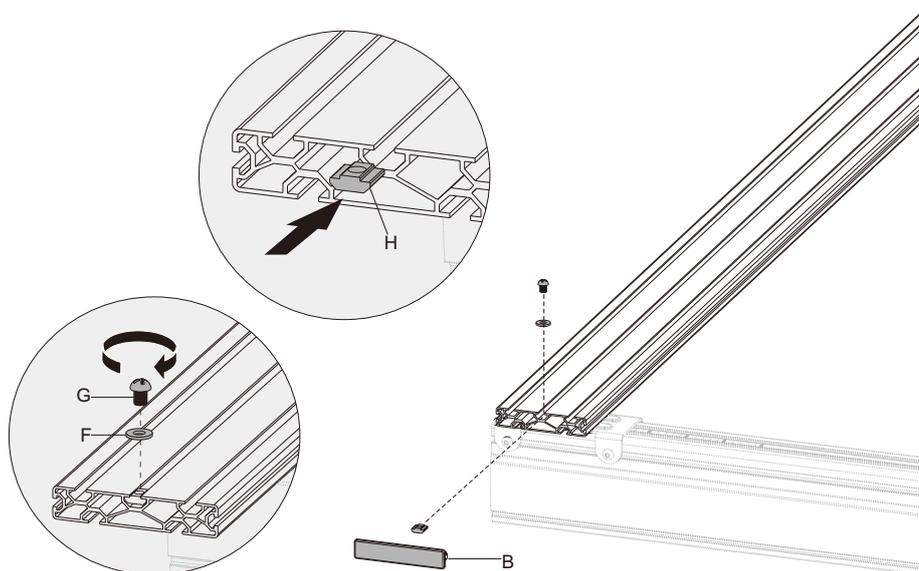

Cable Management

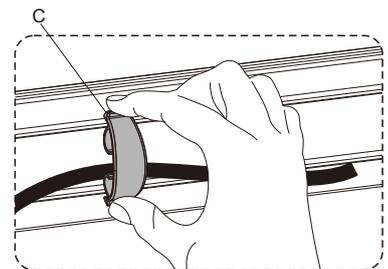

Cross Column Mount



A (x1)




M8x12 (x8)
B




C (x8)



Attach Cross Column Mount to the Column

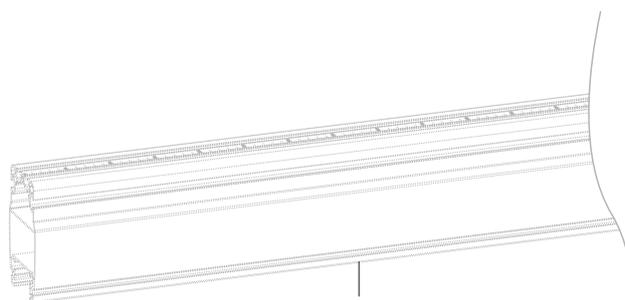

Column L1800

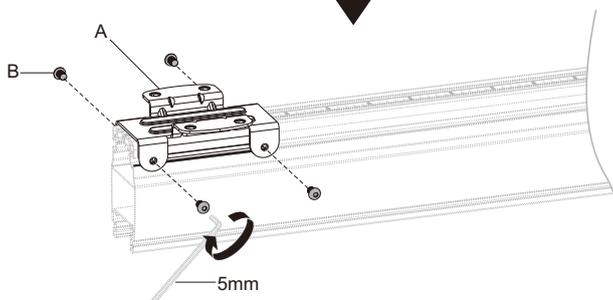


Attach Column to the Rail L2000




Rail L2000


Base Mount and Adjustable Wall Securing

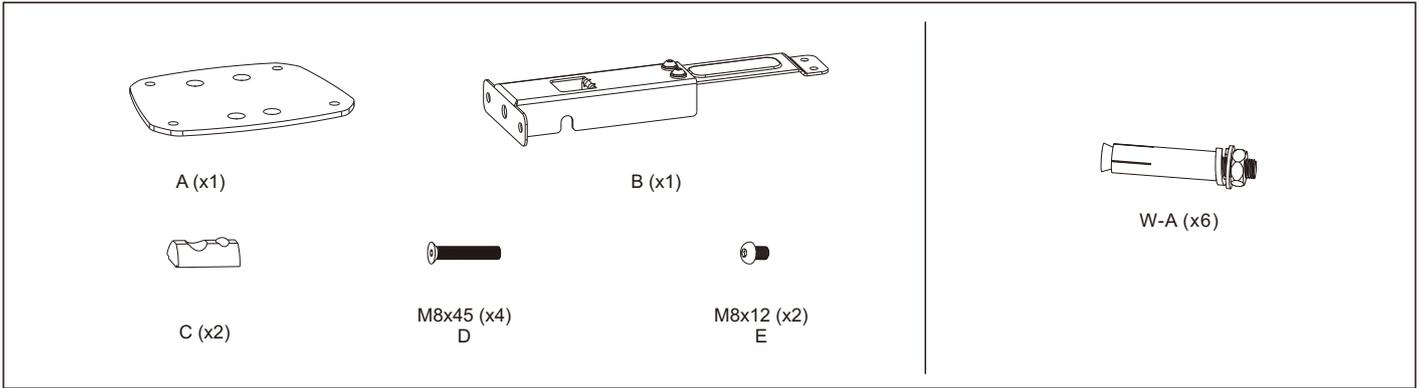




Assemble the Base

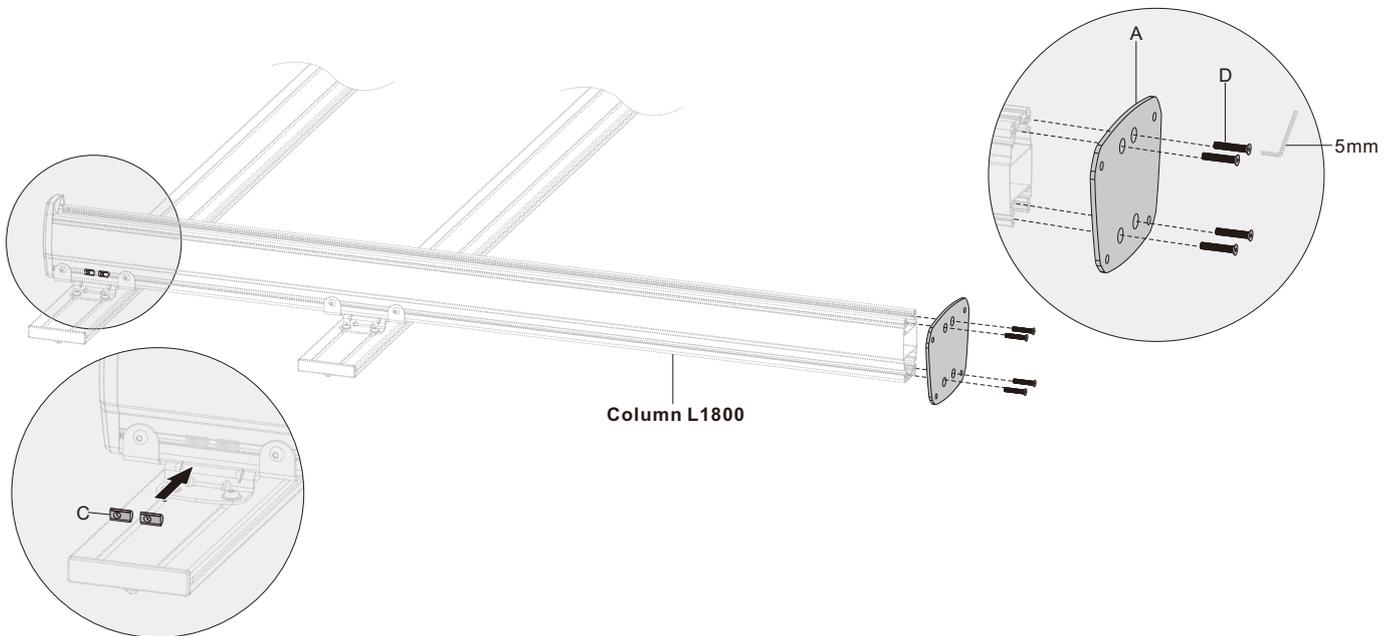


Attach Stand to Solid Brick or Concrete

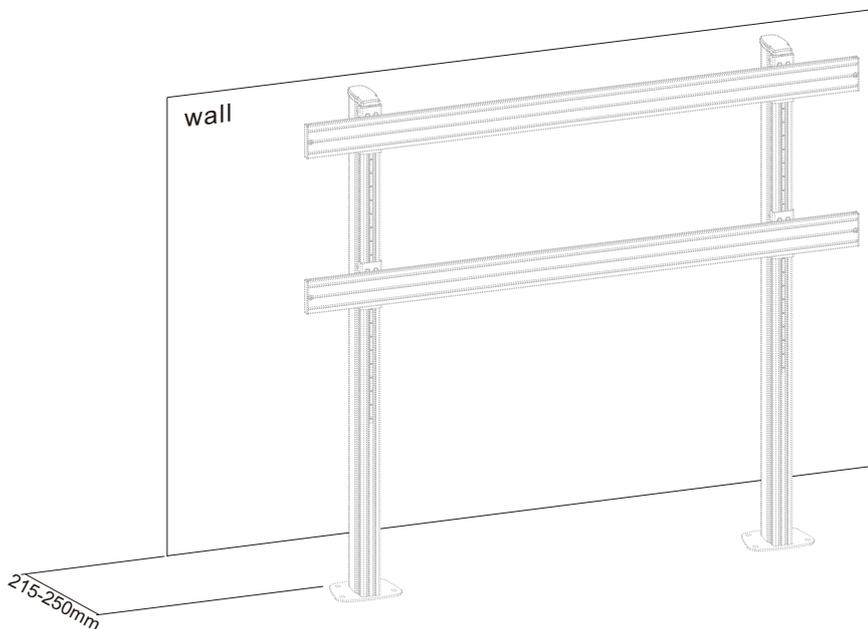





Attach Rail L2000 to Solid Brick or Concrete

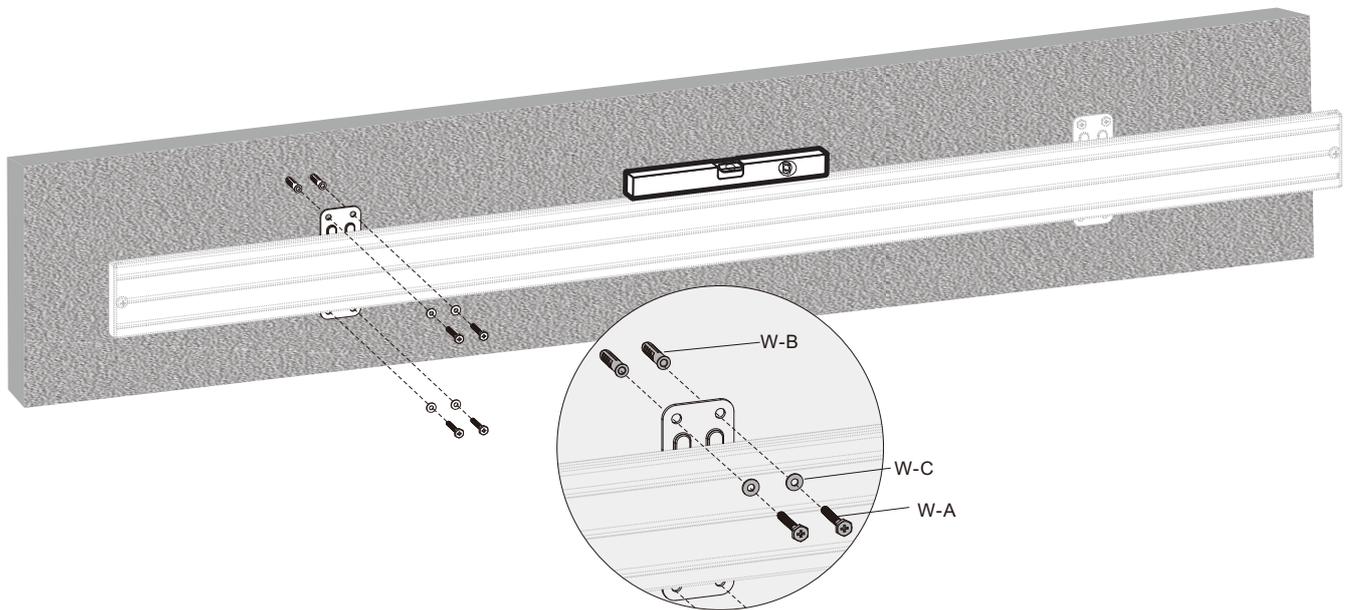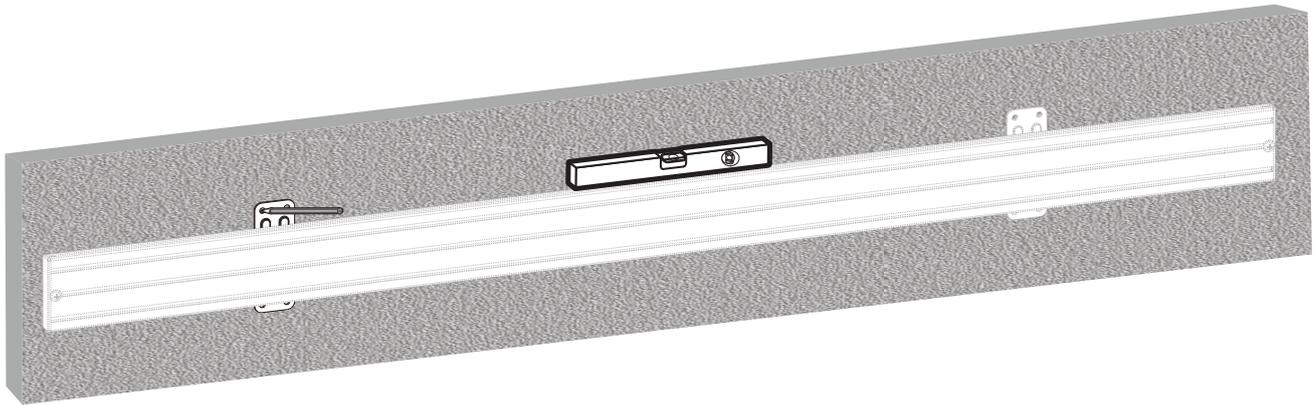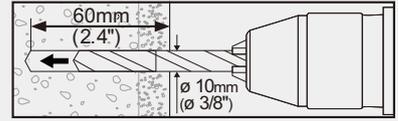


1
Mark the exact location of mounting holes




2
Drill pilot holes





Screw the wall plate onto the wall





1
Mark the exact location of mounting holes



2
Drill pilot holes

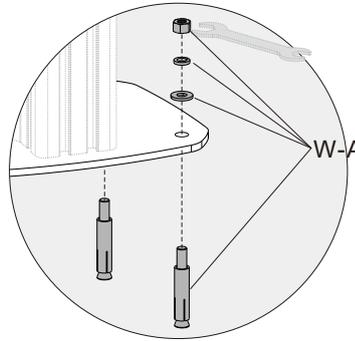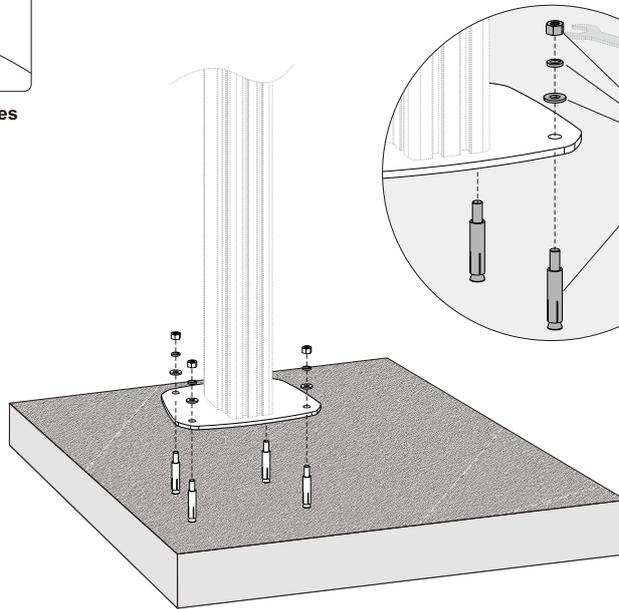


Bolt the fix plate to the floor

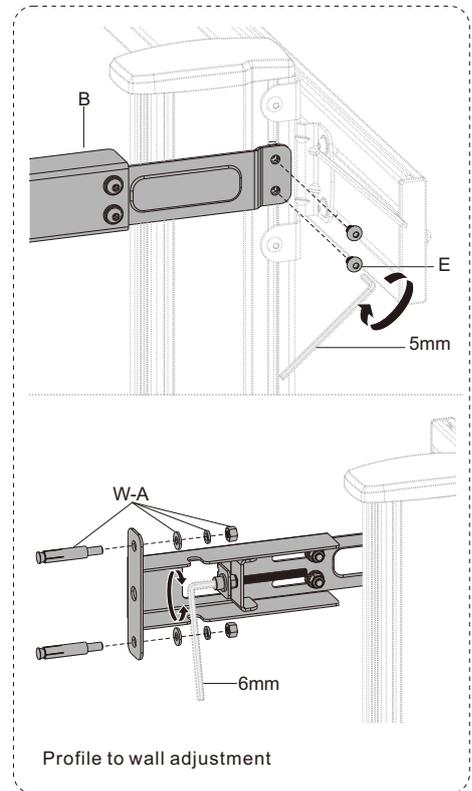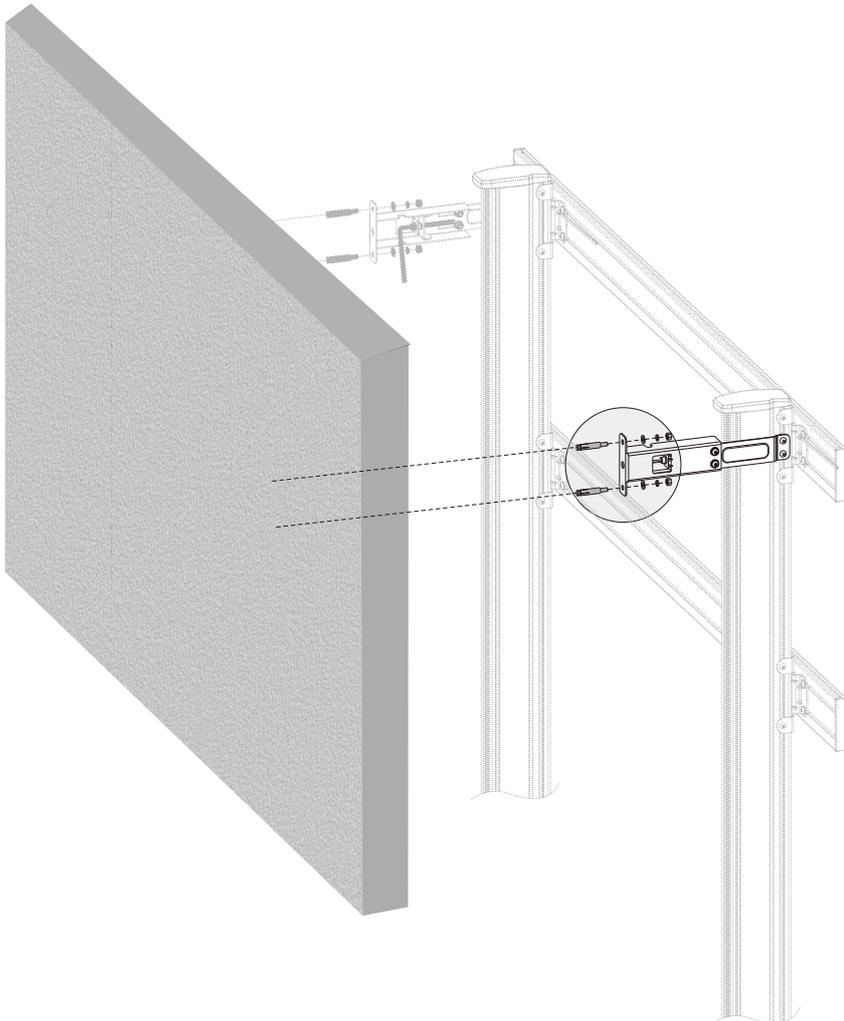


Profile to wall adjustment


Arm L400 Adj (Option 1)

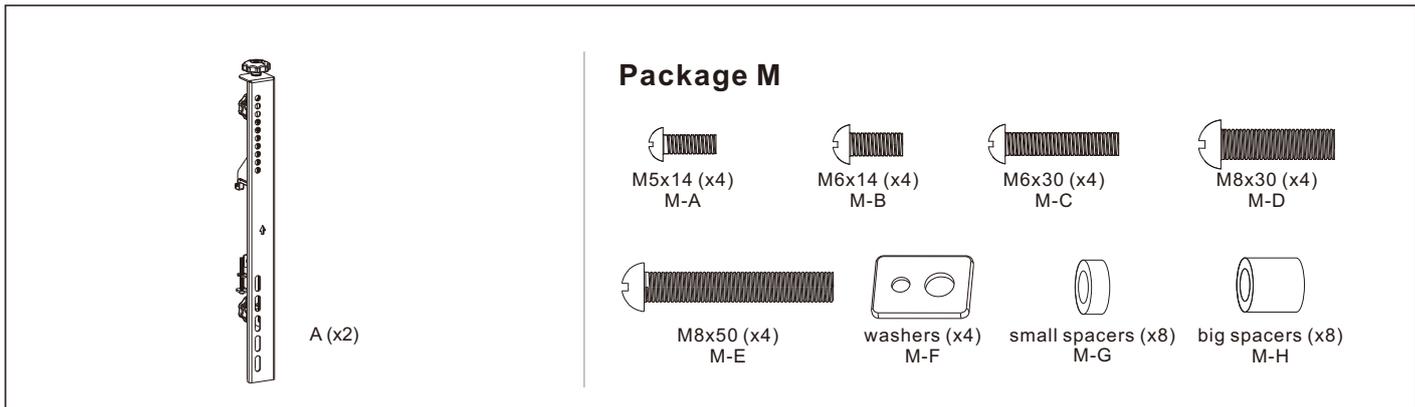


Attach Arm L400 Adj

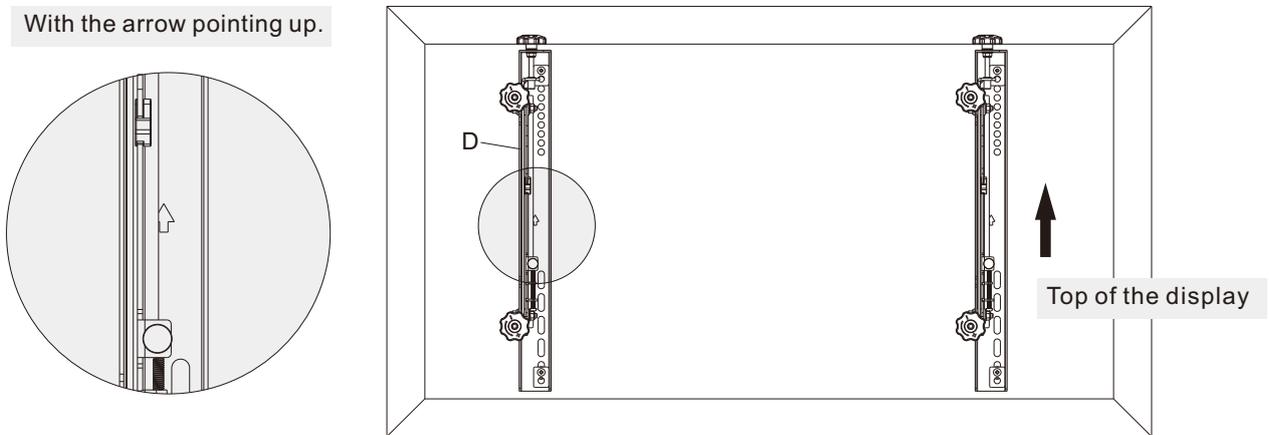

a. Attach Arm L400 Adj to Flat Back Screen

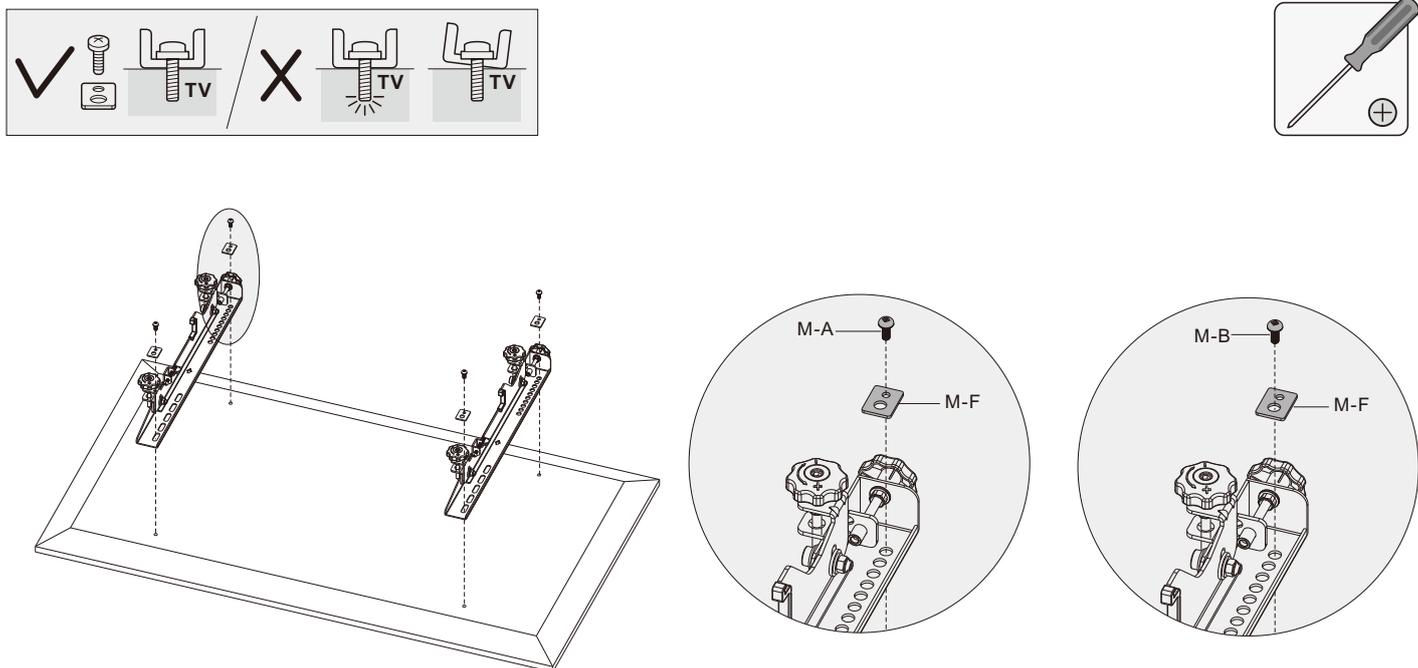


b. Attach Arm L400 Adj to Irregular Back Screen

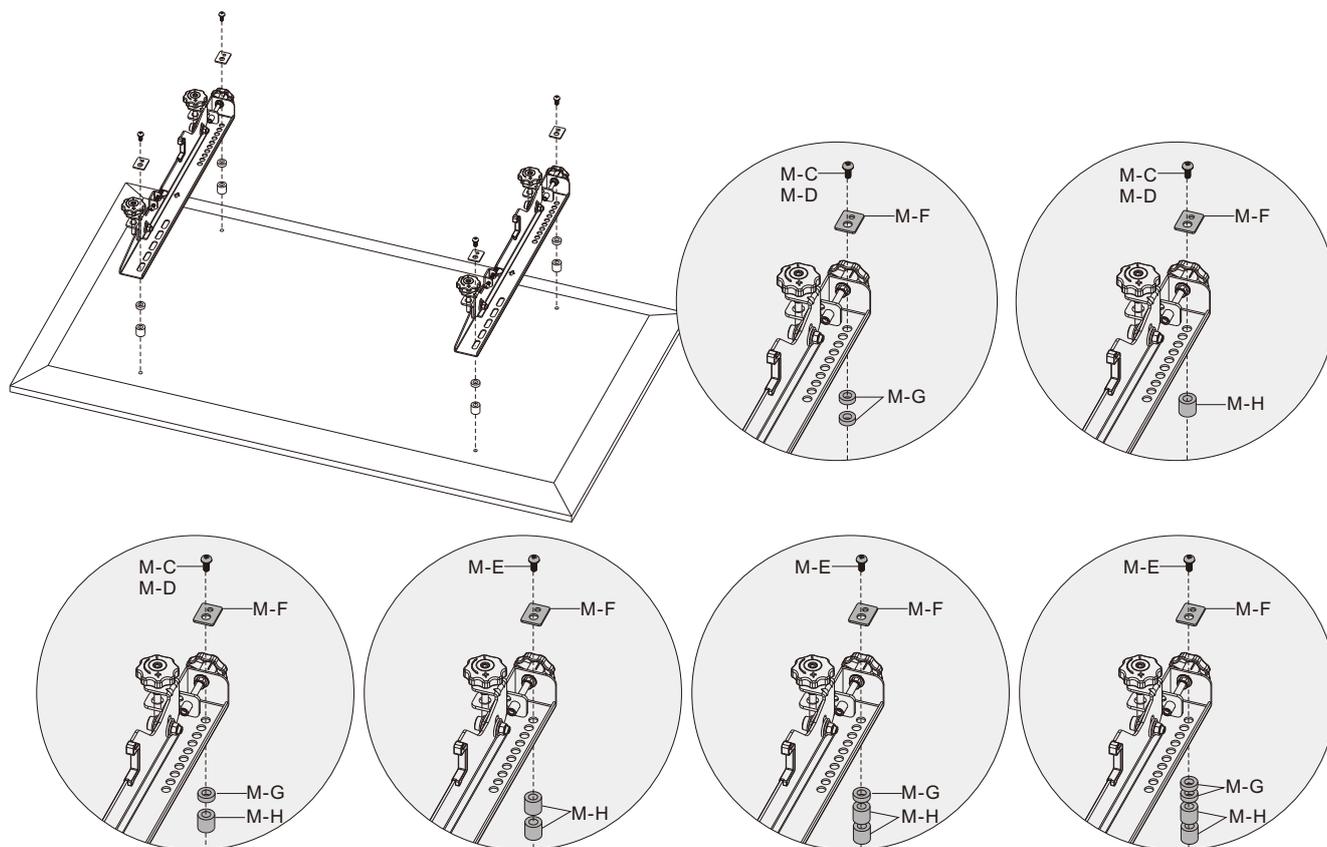


- Choose the appropriate screws, washers and spacers (if necessary) according to the type of screen.
- Center the adapter brackets on the back of the display as shown, and screw the brackets onto the display, being sure to not over-tighten.

Hang the Screen and Micro-Adjustment


Z AXIS Adjustment Knob for Height Adjustment / Screen Leveling
 Y AXIS Adjustment Knob for Depth Adjustment

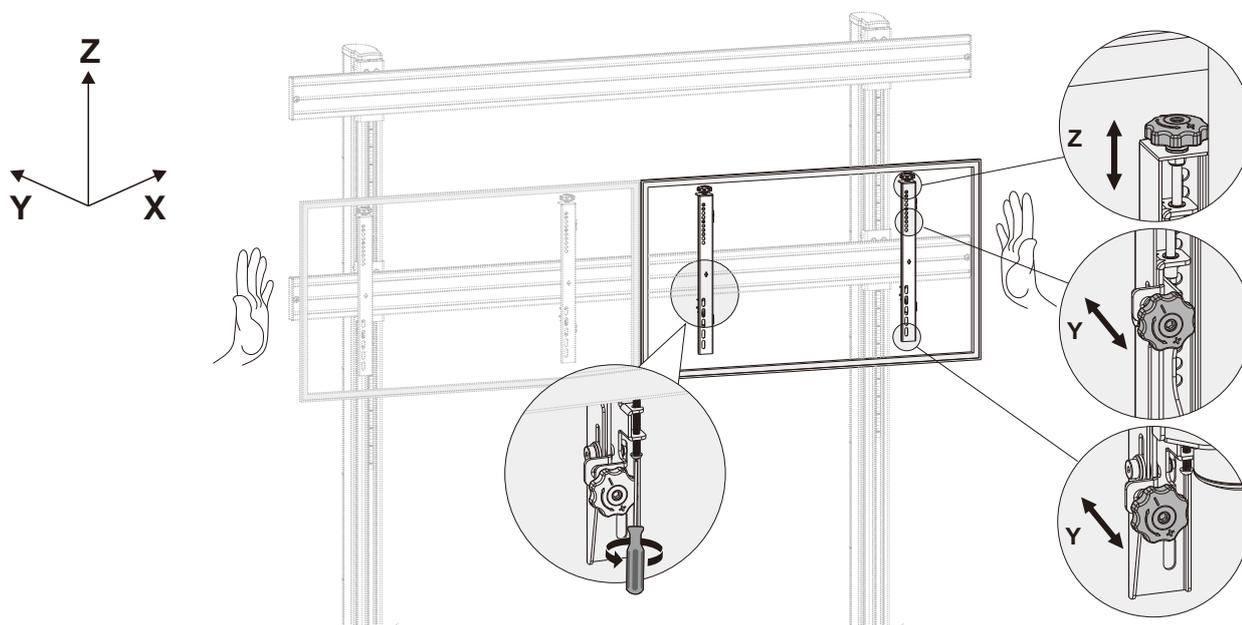


Arm L400 (Option 2)

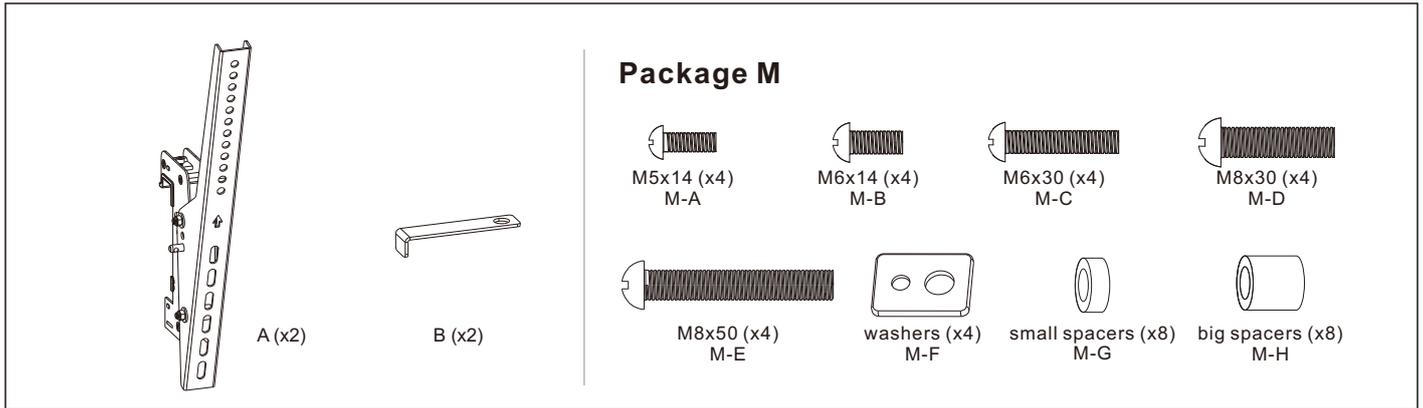





Tilt Adjustment

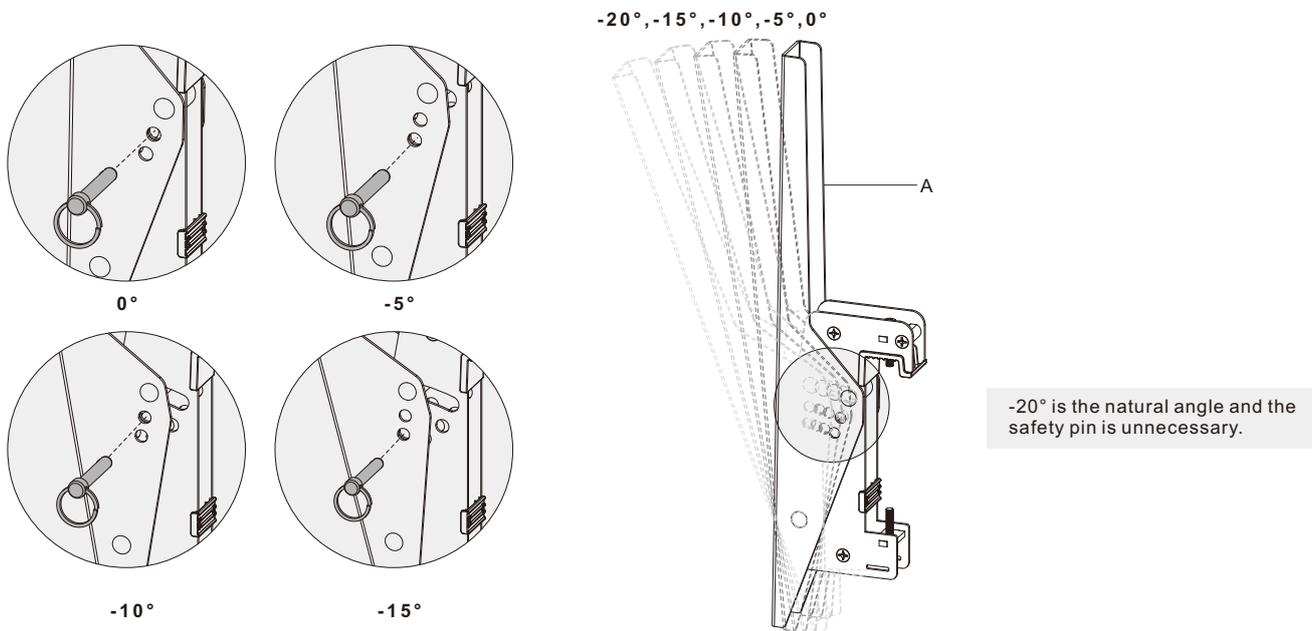








Attach Arm L400

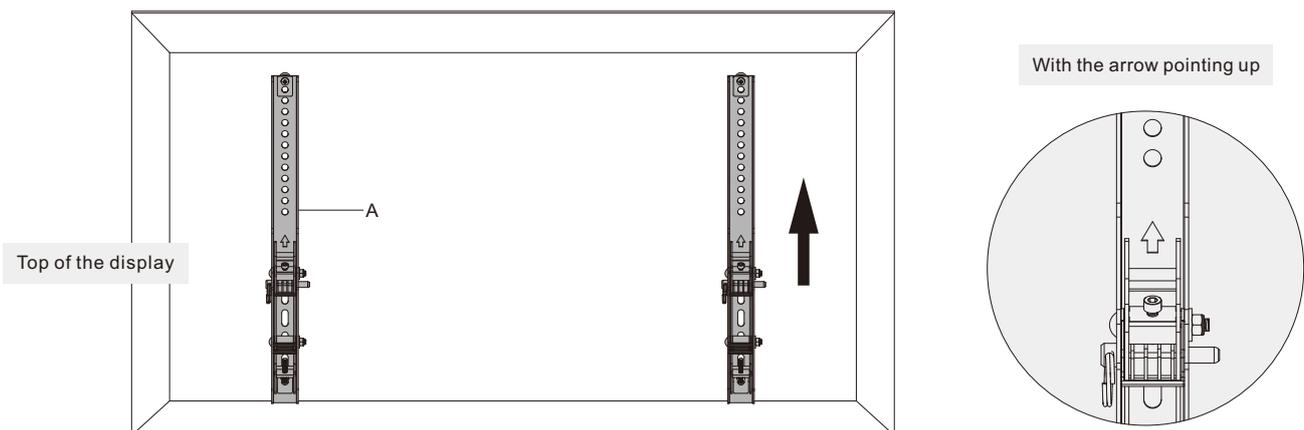

a. Attach Arm L400 to Flat Back Screen

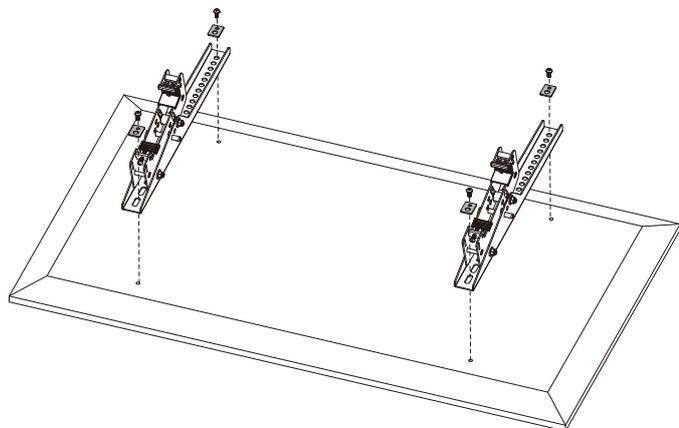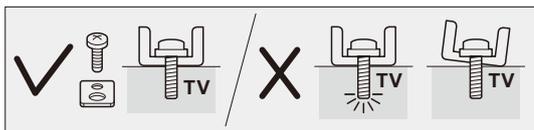

b. Attach Arm L400 to Irregular Back Screen

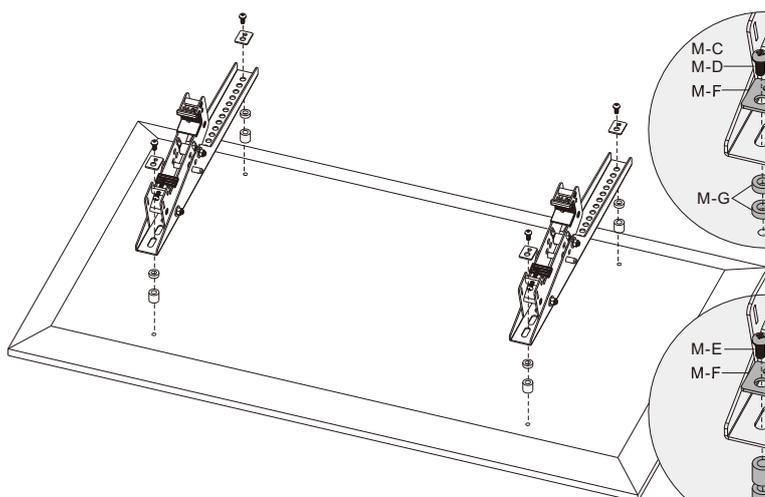

- Choose the appropriate screws, washers and spacers (if necessary) according to the type of screen.
- Center the adapter brackets on the back of the display as shown, and screw the brackets onto the display, being sure to not over-tighten.

Secure with Padlock

