

Features:




LED-F


The **LED-Fixed or LED-F Series** is specifically for fixed installation. The LED cabinet is slim and light weight which also include feature like pre-alignment and front access.


Optional Accessories like the wall mount structure is also available.

Design

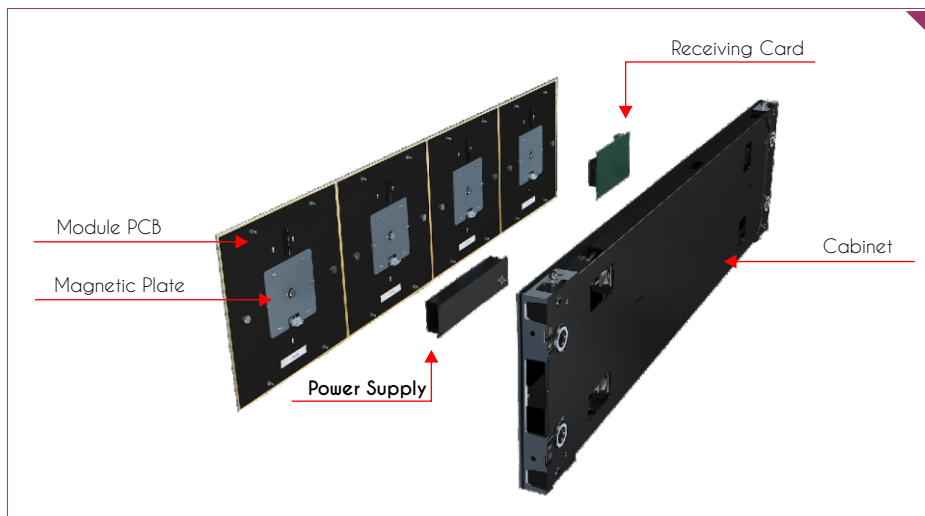

Installation and Services

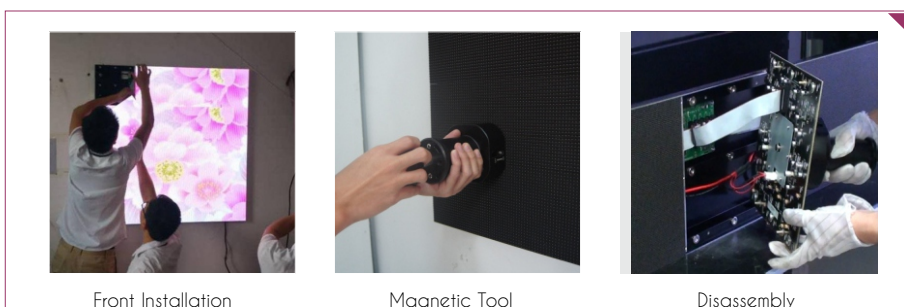

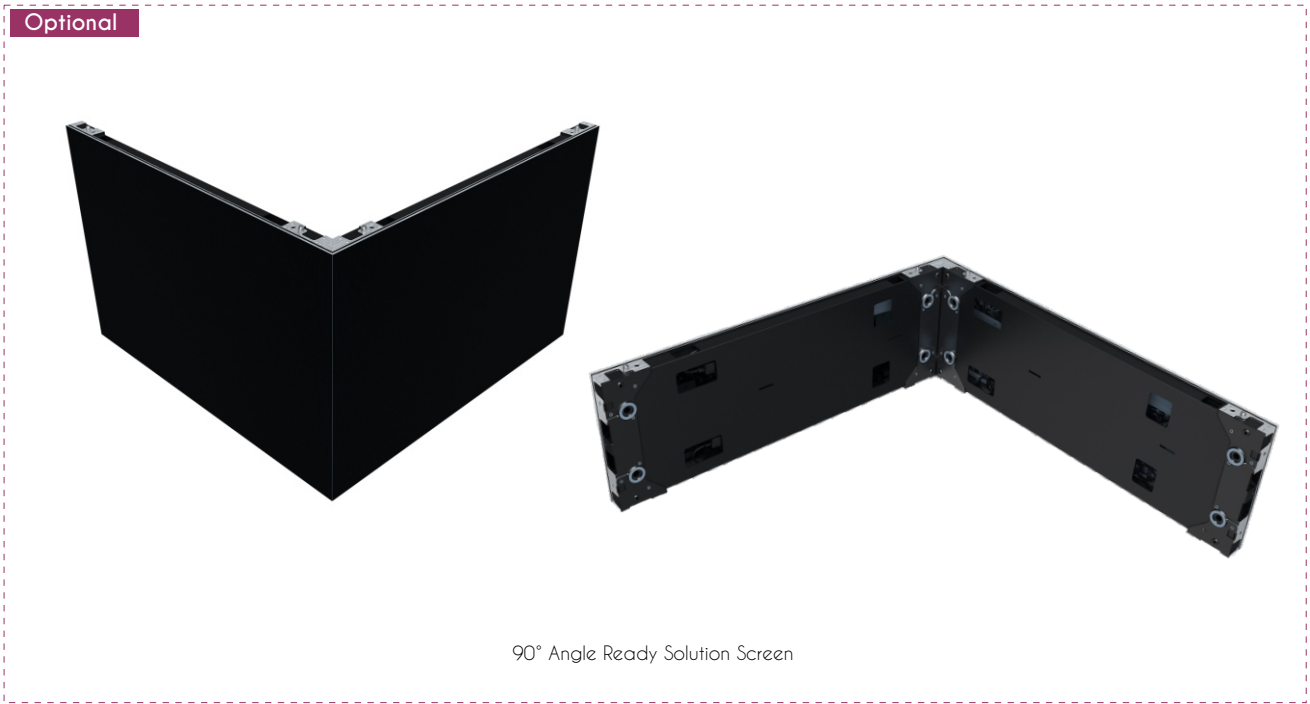

Specifications

LED-Fixed					
	LED-F-P1.2	LED-F-P1.5	LED-F-P1.9	LED-F-P2.6	LED-F-P3.9
Pixel/Dot Pitch	1.2mm	1.5mm	1.9mm	2.6mm	3.9mm
Refresh Rate	3840 Hz	3840 Hz	1920-3840 Hz	1920-3840 Hz	1920-3840 Hz
Brightness	>600 nits	>600 nits	>700 nits	>800 nits	>1200 nits
Physical Density	622,521 pixels/m ²	396,900 pixels/m ²	262,144 pixels/m ²	147,456 pixels/m ²	65,536 pixels/m ²
Resolution Module (Width x Height)	120 x 135 pixels	120 x 135 pixels	128 x 128 pixels	96 x 96 pixels	64 x 64 pixels
Resolution Cabinet (Width x Height)	480 x 270 pixels	384x 216 pixels	512 x 128 pixels	384 x 96 pixels	256 x 64 pixels
Contrast Ratio	3000:1	3000:1	3000:1	3000:1	3000:1
Viewing Angle	140/140°	140/140°	140/140°	140/140°	140/140°
Input Option	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA
Dimension Module (Width x Height)	152 x 171mm	152 x 171mm	250 x 250mm	250 x 250mm	250 x 250mm
Dimension Cabinet (W x H x Depth)	609*343*60	609*343*60	1000 x 250 x 42mm	1000 x 250 x 42mm	1000 x 250 x 42mm
Weight	6.5 kgs	6.5 kgs	4.8 kgs	6 kgs	6 kgs
Power Usage Average	725w/sqm	725w/sqm	53.6W	53.6W	53.6W
Power Usage Maximum	251w/sqm	251w/sqm	140W	140W	140W
Operating Temperature	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C
Input Voltage	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz
Waterproof Rating	IP20	IP20	IP30	IP30	IP30

* Pictures are for illustration purposes, actual items will vary without notice