


Features:

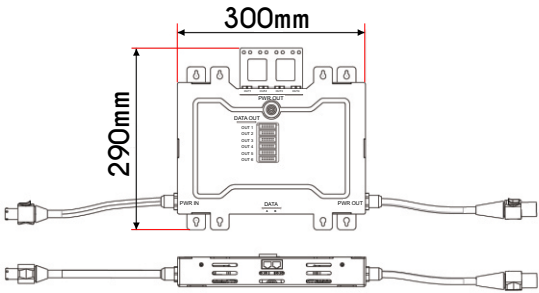

TheLED-Wave or LED-W Series features a special flexible but durable P for convex and concave curved displays.

Lightweight and easy assembly with no tools required. The advance magnetic system enables easy front accessibility and maintenance.


Stacking and hanging system optional, it is the perfect series to adapt in different structures and environment.

Applications:

Stage performance, launch party, show room, exhibition, museum, activity center, shopping mall, stadium

Key Features:

- Convex & Concave Flexible Solution
- Screws Free & Magnetic Cylinder Installation
- Front Maintenance
- Refresh Rate Up To 3840Hz
- Stacking & Hanging Installation Optional

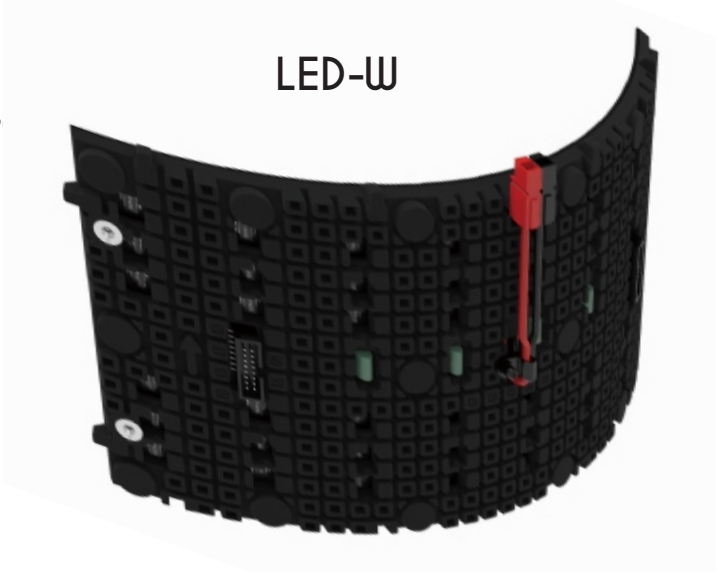

Specifications

LED-Wave	LED-W-P 1.9	LED-W-P2.5	LED-W-P4	LED-W-P6	LED-F-P 10
Pixel/Dot Pitch	1.9mm	2.5mm	4mm	6.67mm	10mm
Refresh Rate	3840 Hz	3840 Hz	3840 Hz	3840 Hz	3840 Hz
Brightness	1000 nits	1000 nits	1000 nits	1200 nits	1200 nits
Physical Density	275, 625	160, 000	62, 500	22, 500	10, 000
Resolution Module (Width x Height)	168 x 84 pixels/m ²	128 x 64 pixels/m ²	80 x 40 pixels/m ²	48 x 24 pixels/m ²	32 x 16 pixels/m ²
Contrast Ratio	3000:1	3000:1	3000:1	3000:1	3000:1
Viewing Angle	160/160°	160/160°	160/160°	160/160°	160/160°
Input Option	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA
Dimension Module (Width x Height)	320 x 160mm	320 x 160mm	320 x 160mm	320 x 160mm	320 x 160mm
Weight	0.48kg	0.5kg	0.5kg	0.5kg	0.5kg
Power Usage Average.	240W/m ²	240W/m ²	240W/m ²	240W/m ²	240W/m ²
Power Usage Maximum	720W/m ²	720W/m ²	720W/m ²	720W/m ²	720W/m ²
Operating Temperature	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C	-10°C to 45° C
Input Voltage	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz
Waterproof Rating	IP30	IP30	IP30	IP30	IP30

* Pictures are for illustration purposes, actual items will vary without notice