



Features:



LED-AW-H

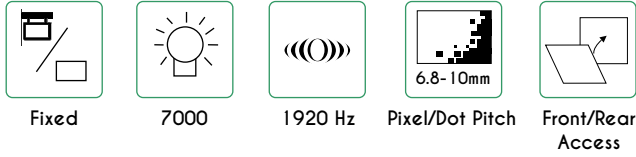

LED-AW-H

- IP65, suitable for almost any environment.
- Support both front and rear maintenance.



Specifications

LED-AW-H	LED-AW-H-P6.8	LED-AW-H-P8.3	LED-AW-H-P10
	Pixel/Dot Pitch	6.8mm	8.3mm
Refresh Rate	1920 Hz	1920 Hz	1920 Hz
Brightness	>7000 nits	>7000 nits	>7000 nits
Physical Density	21,316 pixels/m ²	14,400 pixels/m ²	10,000 pixels/m ²
Resolution Module (Width x Height)	44 x 44 pixels	36 x 36 pixels	30 x 30 pixels
Resolution Cabinet (Width x Height)	88 x 176 pixels	72 x 144 pixels	60 x 120 pixels
Contrast Ratio	3000:1	3000:1	3000:1
Viewing Angle	150/140°	150/140°	150/140°
Input Option	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA	DVI, HDMI, SDI, VGA
Dimension Module (Width x Height)	300 x 300mm	300 x 300mm	300 x 300mm
Dimension Cabinet (W x H x Depth)	600 x 1200 x 105mm		
Weight	19.5kg	19.5kg	19.5kg
Power Usage Average	600W	600W	600W
Power Usage Maximum	240W	240W	240W
Operating Temperature	-10°C to 45°C	-10°C to 45°C	-10°C to 45°C
Input Voltage	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz	110 to 230Vac, 50-60Hz
Waterproof Rating	IP30	IP30	IP30

* Pictures are for illustration purposes, actual items will vary without notice